

## Description and facts


	Solubility in g/l at 30°C							Process Suitability	Other Fastness	Light Fastness AATCC 16E			Post Fastness Properties							
	Affinity	Reactivity	Fixation temperature	Exhaust	Cold Pad patch	Printing	Continuous			Dischargeability	Washing Fastness ISO 105 C04	Rubbing ISO 105/X12 Dry	Rubbing ISO 105/X12 Wet	0,1%	1,0%	2,0%	Water ISO 105 E01	Chlorinated Pool Water AATCC 162:2002	Hydrogene Peroxide	Perspiration ISO 105 E04 Acid
<b>Imcozin Ultra Yellow CDG</b>	120	L	H	60	S	S	S	S	Moderate	4-5	4-5	4	4	4	4	4-5	4-5	4	4	4
<b>Imcozin Ultra Orange CDG</b>	150	H	M	60	HS	HS	S	S	Good	4-5	4-5	4	3	3.5	4	4	1	4-5	4-5	4-5
<b>Imcozin Ultra Red CDG</b>	100	L	H	60	S	S	S	S	Moderate	4	4-5	4	3.5	4	4	4-5	4-5	4	4	4
<b>Imcozin Ultra Carmine CDG</b>	100	L	H	60	S	S	S	S	Good	4	4-5	4	4	4	4	4-5	4-5	4	4	4
<b>Imcozin Deep Red CDG</b>	100	H	H	60	S	S	S	S	Moderate	4	4	3-4	-	3	3.5	4	-	3-4	3-4	4
<b>Imcozin Navy Blue CDG</b>	100	L	H	60	S	S	S	S	Good	4	4-5	3	3	3.5	3	4-5	4-5	4	4	4-5

H = High / M = Medium / HS = High Suitable / S = Suitable / LS = Low Suitable / NS = Not Suitable

## Impocolor. Color your Life.

Uniquely strong reactive dyes for medium and deep shades with outstanding competitiveness due to very high tinctorial strength and excellent robustness.

The Imcozin CDG / Ultra CDG series

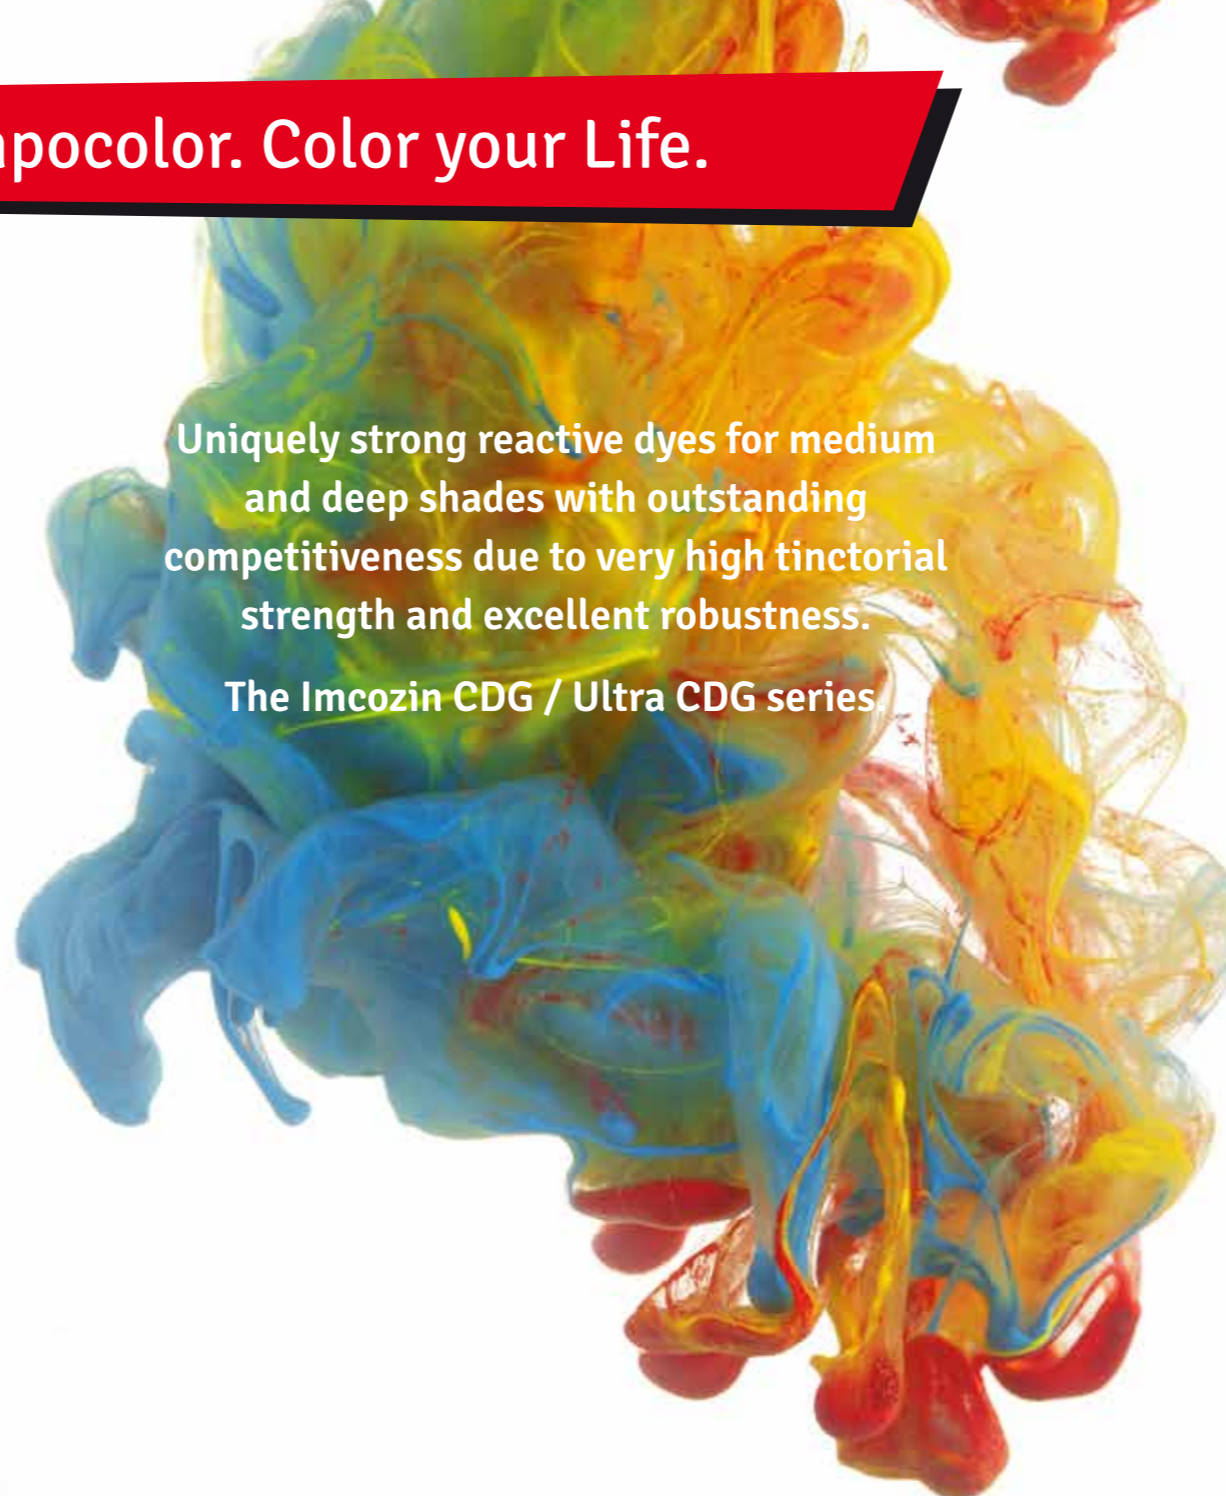

huggier-gestaltung.de Stand 08-2016

**impocolor**  
dyes & chemicals

## Imcozin CDG / Ultra CDG series

Uniquely strong reactive dyes for medium and deep shades with outstanding competitiveness due to very high tinctorial strength and excellent robustness


The information contained in this document is based upon the best knowledge available to us at present state. They do not intend to guarantee any kind of product performance, specific use or application result, since the customised conditions of use and application are beyond our knowledge and control. It is therefore strongly recommended that, before proceeding to industrial scale work, trials should be carried out to access product performance under the specific conditions that will be encountered. Possible trade mark rights as well as existing laws and regulations are to be followed by recipient of our products at his own responsibility.

**IMPOCOLOR**  
dyes & chemicals GmbH  
Pfullinger Str. 4  
72800 Eningen u. A., Germany

Tel. +49 (0)7121 9877-0  
Fax +49 (0)7121 9877-20  
info@impocolor.com  
[www.impocolor.com](http://www.impocolor.com)

# Imcozin CDG / Ultra CDG series

Imcozin CDG / Ultra CDG series – have been developed to produce dark shades more cost effectively with high reproducibility, good overall fastness and excellent build-up properties.

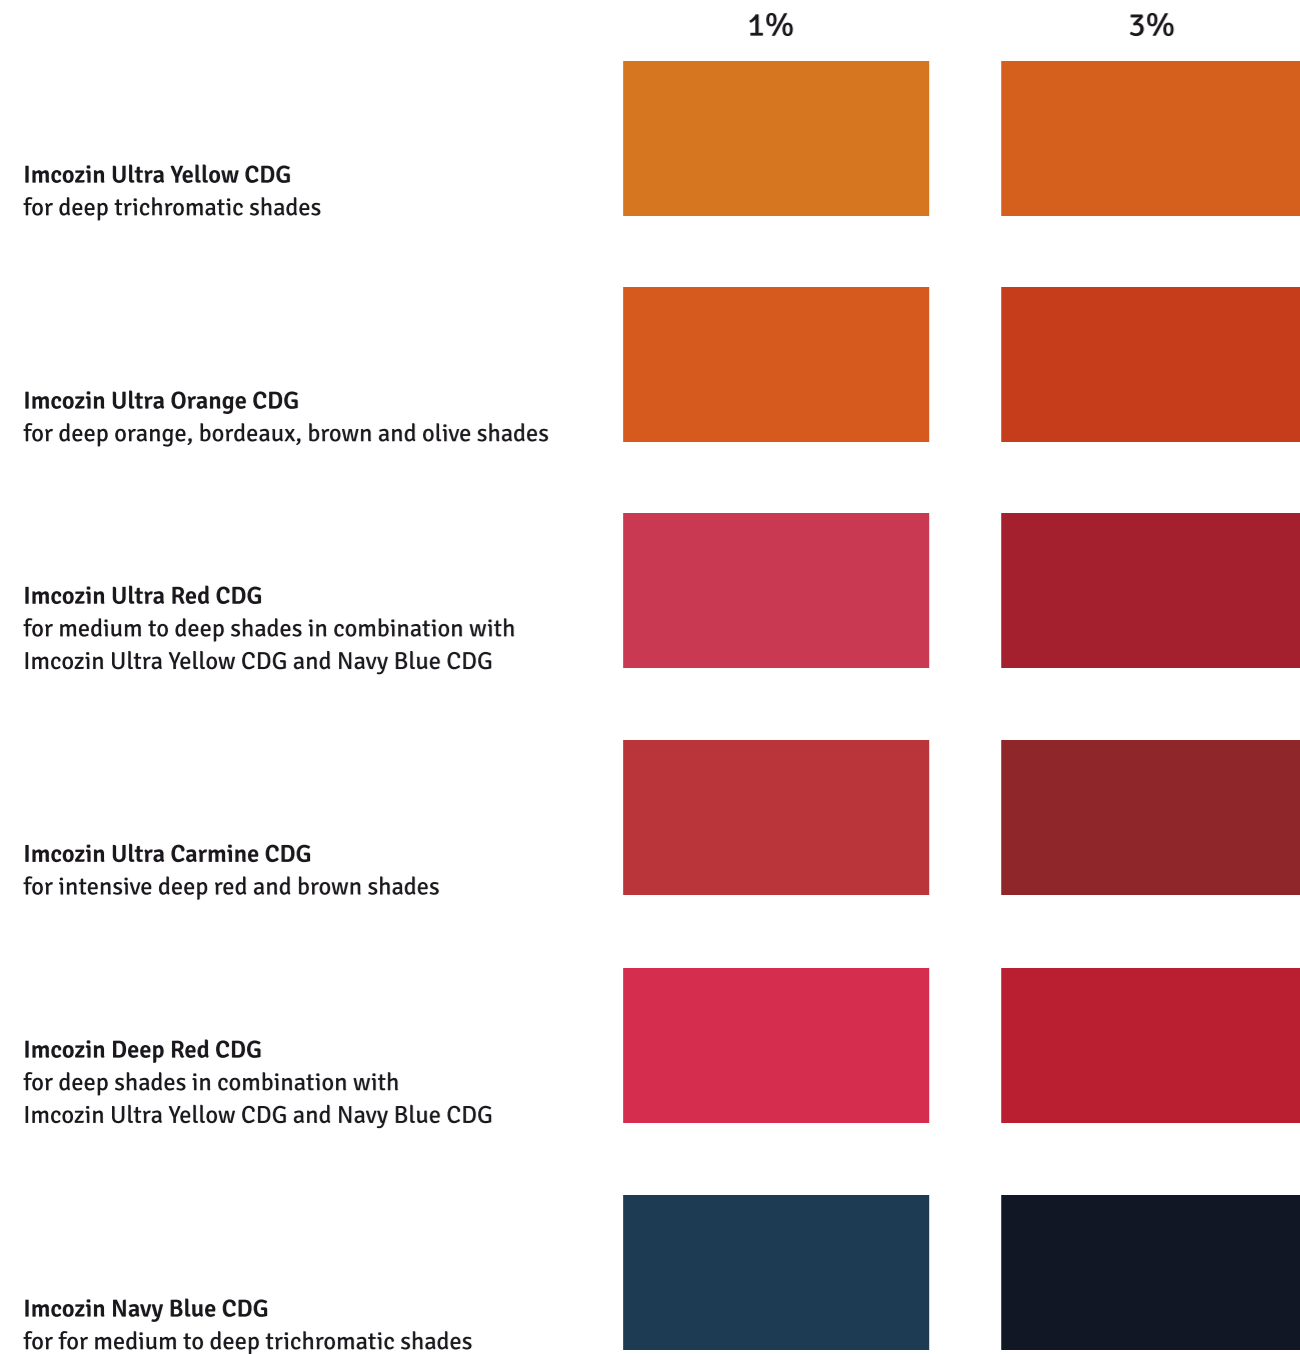


# Tangible benefits and less dye

Tangible customer benefits and less dye consumption.

- |   |  |   |
|---|--|---|
| <b>Reduced costs</b> <ul style="list-style-type: none"> <li>Less dyestuff</li> <li>Less water</li> <li>Less energy</li> <li>Less inventory</li> </ul> | <b>Increased productivity</b> <ul style="list-style-type: none"> <li>Shorter production times</li> <li>Excellent build-up properties</li> <li>Higher robustness</li> </ul> | <b>High performance</b> <ul style="list-style-type: none"> <li>Good reproducibility</li> <li>Good overall fastness</li> <li>Eco-compliance</li> </ul> |
|---|--|---|



Significant less dye is needed to achieve the required shade

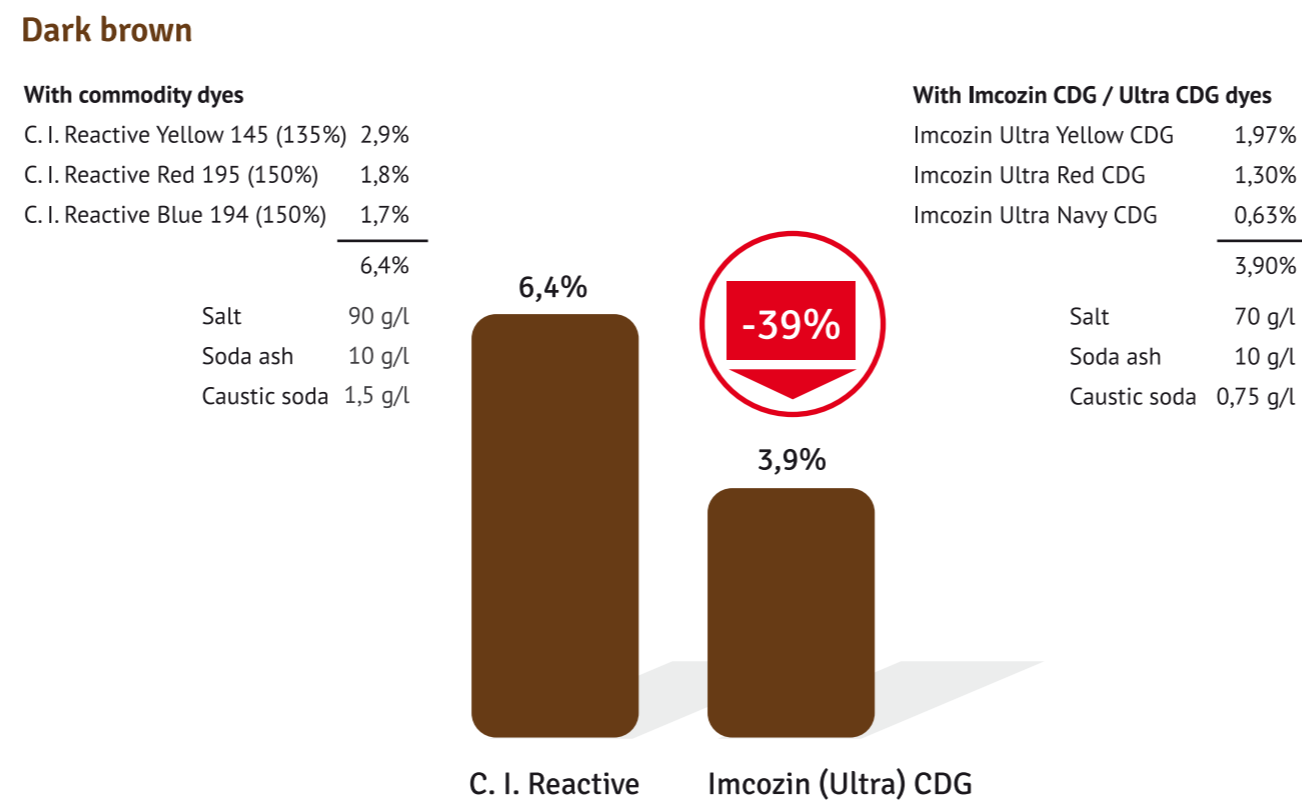

# Increase your productivity


Salt & alkali requirement

Exhaust dyeing - M:L Ratio 1:10

Depth of shade	Sodium chloride or glauber salt		Soda ash (g/l)	Soda + caustic soda (g/l)	Fixation (minutes)
	Unmercerized cotton	Visoce or mercerized cotton			
Upto 0,10%	10	7	10	-	30
0,11% - 0,30%	20	10	15	-	30
0,31% - 0,50%	30	20	20	-	30
0,51% - 1,00%	40	30	20	-	45
1,01% - 2,00%	50	40	-	10 + 0,50	45
2,01% - 4,00%	60	50	-	10 + 0,75	60
> 4,00%	70	60	-	10 + 1,00	60

Dyeing: Exhaustion for 30 - 60min and fixation for 30 - 60min at 60°.

Dyeing Process Diagram

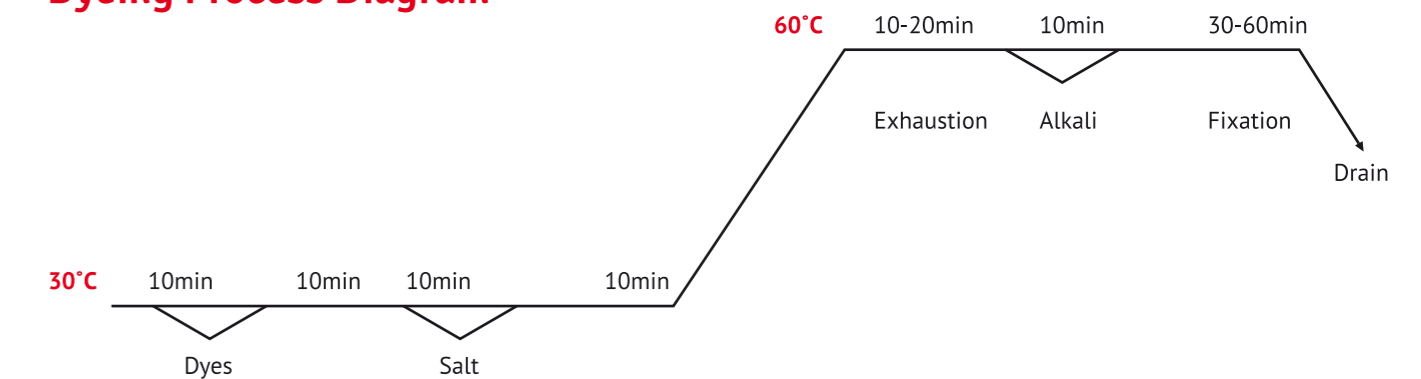

Excellent wash-off properties for increased productivity

